

## Redi-Flo4 Environmental Submersible Pumps

### Submittal Data

### 3450 RPM


### 60 Hertz



JOB or CUSTOMER:	
ENGINEER:	
CONTRACTOR:	
SUBMITTED BY:	DATE:
APPROVED BY:	DATE:
ORDER NO:	DATE:
SPECIFICATION REF:	

QUANTITY	TAG NO.	MODEL NO.	GPM	FEET	VOLT	PHASE	COMMENTS

#### Dimensions

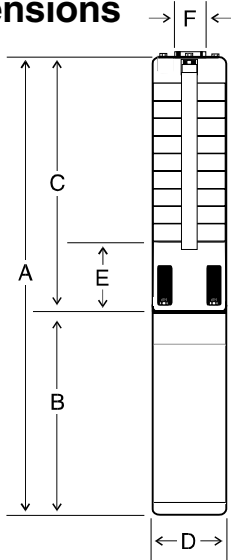

#### Technical Data

**FLOW RANGE:** 1.2 to 7 U.S. GPM

**MOTORS:** Grundfos MS402E Environmental Submersible Motor (Standard)  
 Maximum Operating Temperature: 104°F (40°C)  
 Maximum Submergence Pressure: 220 PSI  
 Maximum Number of Starts Per Hour: 100  
 Minimum Recommended Flow Past Motor: 0.25 ft./sec.

(NOTE: Franklin Pollution Recovery motor is optional.)

**DISCHARGE SIZE:** 1" NPT


**MATERIALS OF CONSTRUCTION:** See reverse side.

**INSTALLATION:** Unit to be installed vertically for submerged operation.

### Electrical Data, Dimensions, and Weights ①

Pump Type	Motors				DIMENSIONS IN INCHES							
	HP	SF	PH	Volts	Overall Length A	Motor Length B	Pump End Length C	Max. Dia. D	Inlet E	Disch. Pipe Size (NPT) F	Net Weight (Lbs.) <sup>②</sup>	Ship. Weight (Lbs.) <sup>②</sup>
5E3	½	1.60	1	230	19 ⅜	10 ⅜	8 ⅜	3 ⅜	3 ¼	1	24	26
5E5	½	1.60	1	230	21 ⅜	10 ⅜	10 ⅜	3 ⅜	3 ¼	1	25	27
5E8	½	1.60	1	230	23 ⅜	10 ⅜	12 ¾	3 ⅜	3 ¼	1	27	28
5E12	½	1.60	1	230	26 ⅜	10 ⅜	16	3 ⅜	3 ¼	1	28	29
5E17	¾	1.50	1	230	31 ⅜	11 ⅜	20 ⅜	3 ⅜	3 ¼	1	31	32
5E21	1	1.40	1	230	35 ⅜	12	23 ⅜	3 ⅜	3 ¼	1	33	35
5E25	1 ½	1.30	1	230	40 ⅜	13 ⅜	26 ¾	3 ⅜	3 ¼	1	35	37

① Data for Grundfos MS402E motors. ② Does not include motor leads.

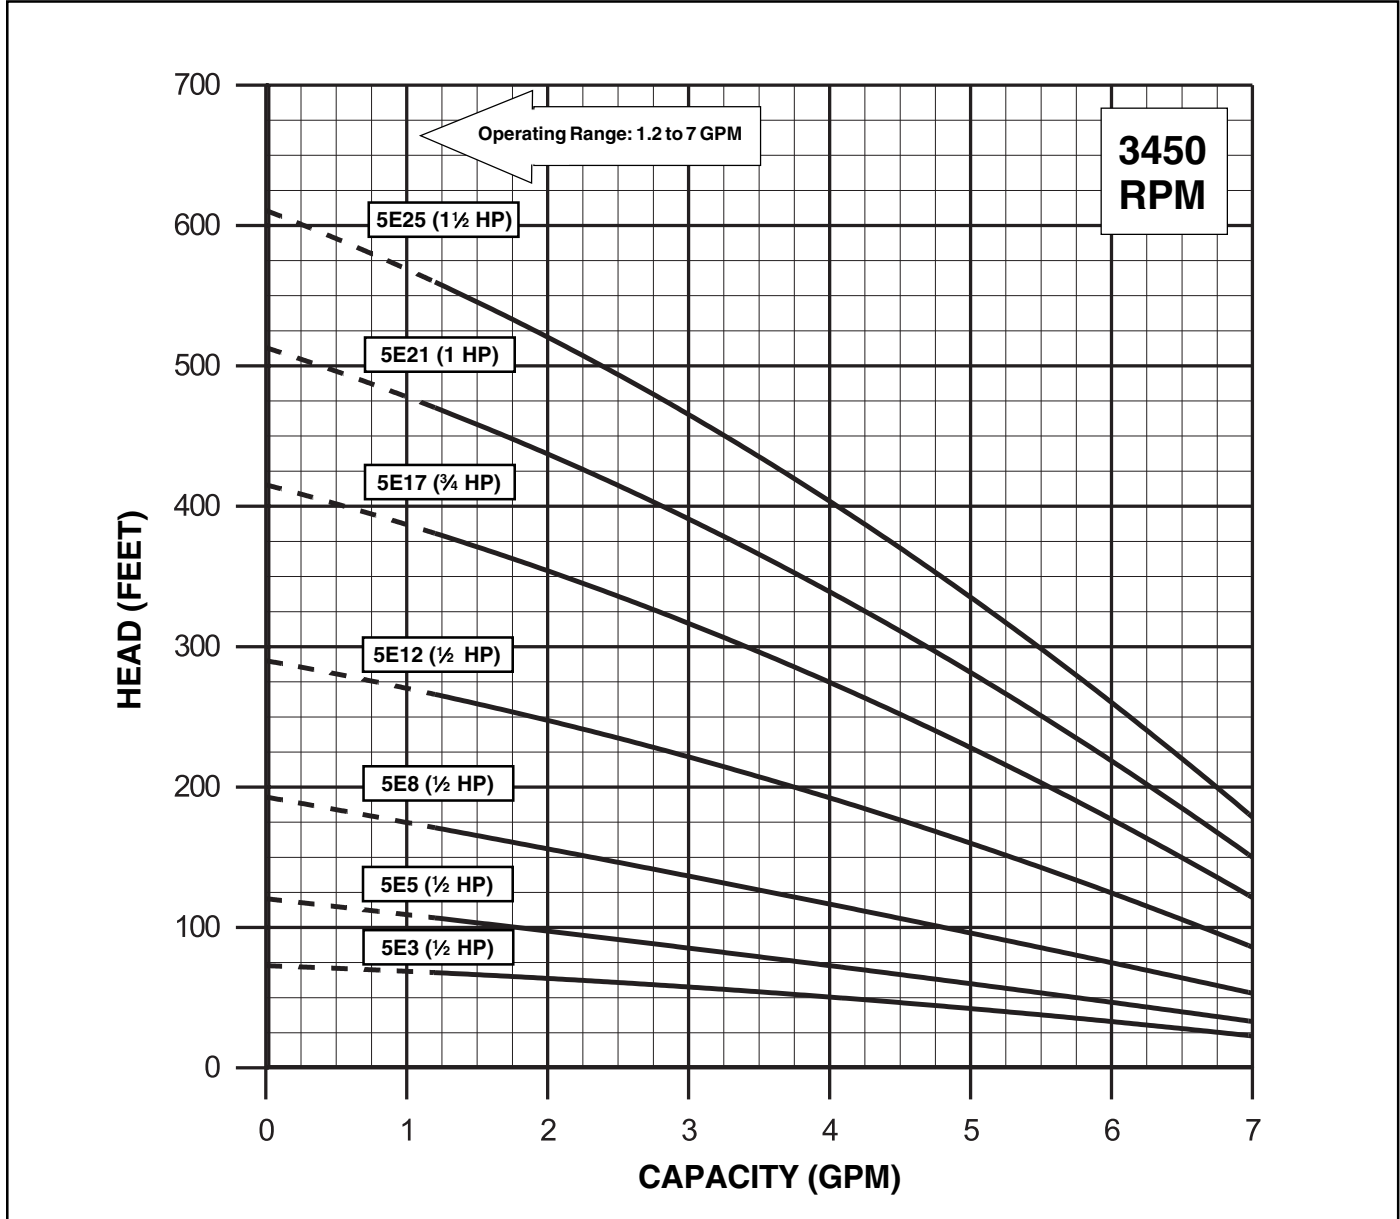

## Materials of Construction

### REDI-FLO4 PUMP END

Description	Material
Check Valve Housing, Check Valve, Diffuser Chamber, Impeller, Suction Interconnector, Inlet Screen, Pump Shaft, Straps, Cable Guard, Priming Inducer	304 SS
Check Valve Seat	304 SS & Teflon®
Impeller Seal Ring	Teflon®
Coupling	316/431 SS
Intermediate Bearings	Teflon®

### GRUNDFOS ENVIRONMENTAL MOTOR LEADS

Description	Material
Connector Sleeve	304 SS
Connector Potting	Scotch Cast #4® Epoxy w/FPM Cap
Connector Plug	FPM
Lead Insulation	Teflon®
Conductor	Stranded Copper, 12 AWG

**NOTES:** Specifications are subject to change without notice.  
 Teflon® is a registered trademark of DuPont.  
 Scotch Cast #4® is a registered trademark of 3M Company.

### GRUNDFOS ENVIRONMENTAL MOTOR

Description	Material
NEMA Top, Studs & Fasteners, Stator Housing, Fill Plug Screw	304 SS
Nuts	316 SS
Sand Slinger	FPM
Shaft Extension	431 SS
Diaphragm	FPM
Fill Plug Washer	Teflon®



**GRUNDFOS Pumps Corporation** • 3131 N. Business Park Ave. Fresno, CA 93727  
**Customer Service Centers:** Allentown, PA • Fresno, CA  
**Phone:** (800)333-1366 • **Fax:** (800)333-1363  
**Canada:** Oakville, Ontario • **Mexico:** Apodaca, N.L.