



PUMPSOK™

Real. Friendly. Experts.™

CTT-CBM Cable


Description

CTT-CBM cable is ideal for use in deeper CBM wells where the temperature is hotter and higher pressures are a consideration due to well depth.

This is also an excellent cable in water well applications where large quantities of CO₂ are not an issue. CTT-CBM is one of the most cost effective armored cables in the cable family. This CTT-CBM cable has been rated for 2000 volt operation.

CTT-CBM FLAT CABLE

- 1- Armor: Galvanized steel
- 2- Jacket: Black electrical grade thermoplastic insulation
- 3- Ground wire: Ground wire, NEC compliant
- 4- Conductor: Soft drawn tin coated copper (SDTC)
- 5- Insulation: High dielectric thermoplastic insulation

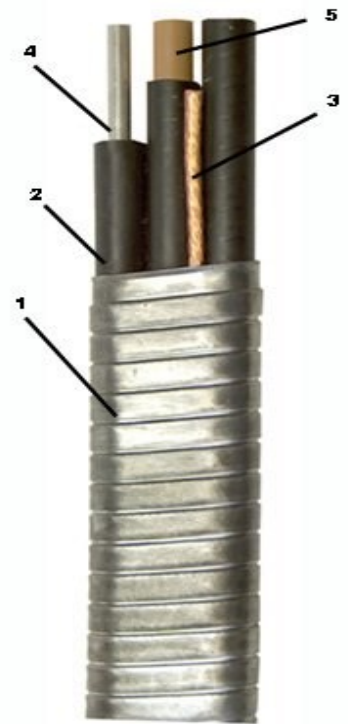

Features and Benefits

Wide temperature range: -40°F (-40°C) to 190°F (88°C)

Thermoplastic insulation and jacket: Dielectric grade materials protect conductor

Grounded: Ground wire provided

Galvanized armor: Protects cable making it ideal for deeper applications

Flat configuration: Ideal for wells with marginal clearance

1220 N.W. 3rd Street • Oklahoma City, OK 73106
Toll-free 1.800.669.3574 • Phone: 405.235.2695
Fax: 405.235.9897 • Web: pumpsok.com